


SERIE EUROPEA ISO 606 - DIN 8187  
EUROPEAN STANDARD ISO 606 - DIN 8187

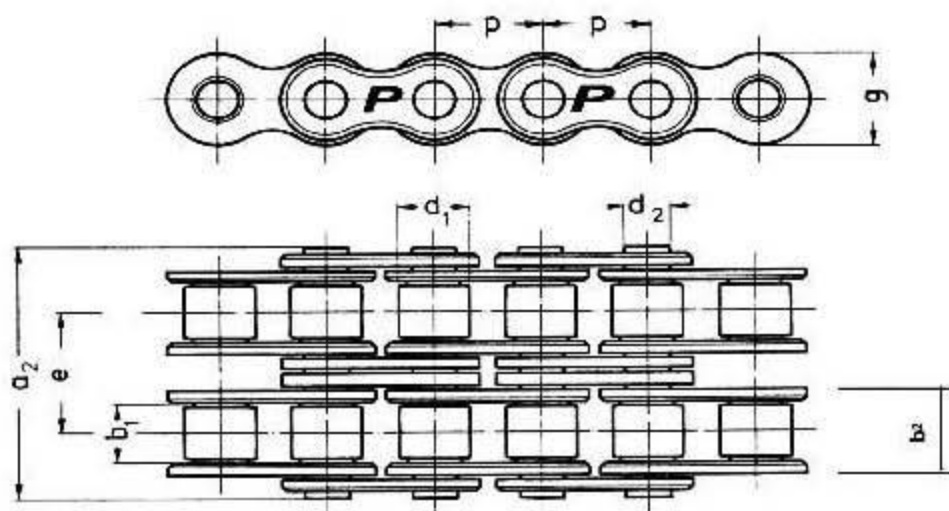

DOPPIA - DUPLEX

ISO Nr.	Tipo Type	Passo mm	b <sub>1</sub> min mm	d <sub>1</sub> max mm	d <sub>2</sub> max mm	b <sub>2</sub> max mm	g max mm	e mm	a <sub>1</sub> max mm	f min kN	Peso Kg/m.	€		
												CATENA METER	GIUNTO PZ.	FALSA MAGLIA PZ.
05B-2	8 x 3	8	3,00	5,00	2,31	4,77	7,11	5,64	14,3	7,8	0,36			
06B-2	3/8" x 7/32"	9,525	5,72	6,35	3,28	8,53	8,26	10,24	23,8	16,9	0,78			
08B-2	1/2" x 5/16"	12,7	7,75	8,51	4,45	11,30	11,81	13,92	31,0	31,1	1,35			
10B-2	5/8" x 3/8"	15,875	9,65	10,16	5,08	13,23	14,73	16,59	36,2	45,5	1,85			
12B-2	3/4" x 7/16"	19,05	11,68	12,07	5,72	15,62	16,13	19,46	42,2	57,8	2,50			
16B-2	1" x 17,02	25,4	17,02	15,88	8,28	25,40	21,08	31,88	68,0	106,0	5,40			
20B-2	1 1/4" x 3/4"	31,75	19,56	19,05	10,19	29,00	26,42	35,45	79,7	170,0	7,20			
24B-2	1 1/2" x 1"	38,1	25,40	25,40	14,63	37,90	33,40	48,36	101,8	280,0	13,50			
28B-2	1 3/4" x 1 1/4"	44,45	30,99	27,94	15,90	45,50	37,08	59,56	124,7	360,0	16,60			
32B-2	2" x 1 1/4"	50,8	30,99	29,21	17,81	46,50	42,29	58,55	126,0	450,0	21,00			

f = Carico di rottura minimo

f = breaking load minimum