


SERIE EUROPEA ISO 606 - DIN 8187

EUROPEAN STANDARD ISO 606 - DIN 8187

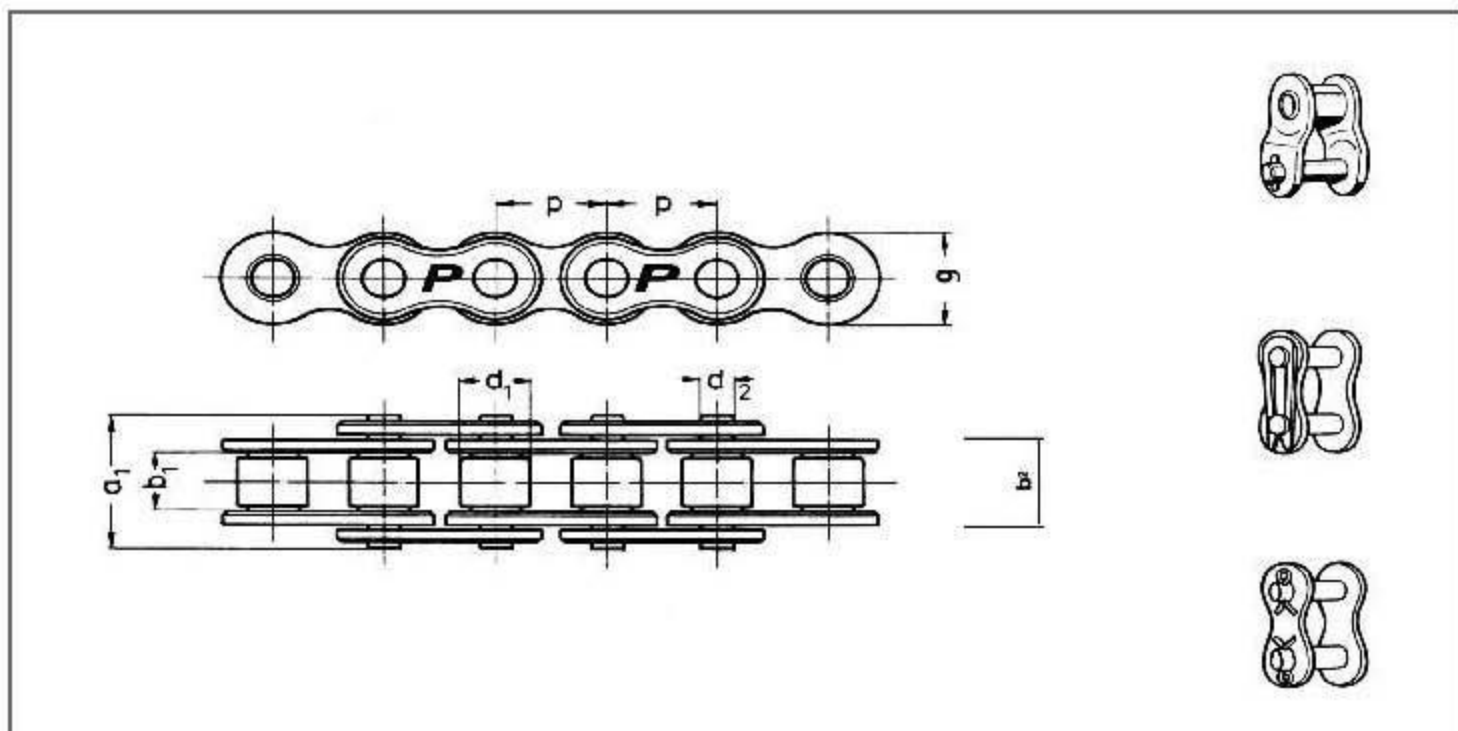

SEMPLICE - SIMPLEX

ISO Nr.	Tipo Type	Passo mm	b ₁ min mm	d ₁ max mm	d ₂ max mm	b ₂ max mm	g max mm	e mm	a ₁ max mm	f min kN	Peso Weight Kg/m.	€		
												CATENA METER	GIUNTO PZ.	FALSA MAGLIA PZ.
04B-1	6 x 2,8	6	2,80	4,00	1,85	4,10	5,00	-	7,4	3,0	0,12			
05B-1	8 x 3	8	3,00	5,00	2,31	4,77	7,11	-	8,6	4,0	0,18			
06B-1	3/8" x 7/32"	9,525	5,72	6,35	3,28	8,53	8,26	-	13,5	8,9	0,41			
08B-1	1/2" x 5/16"	12,7	7,75	8,51	4,45	11,30	11,81	-	17,0	17,8	0,70			
10B-1	5/8" x 3/8"	15,875	9,65	10,16	5,08	13,23	14,73	-	19,6	22,2	0,95			
12B-1	3/4" x 7/16"	19,05	11,68	12,07	5,72	15,62	16,13	-	22,7	28,9	1,25			
16B-1	1" x 17,02	25,4	17,02	15,88	8,28	25,40	21,08	-	36,1	42,3	2,70			
20B-1	1 1/4" x 3/4"	31,75	19,56	19,05	10,19	29,00	26,42	-	43,2	64,5	3,60			
24B-1	1 1/2" x 1"	38,1	25,40	25,40	14,63	37,90	33,40	-	53,4	97,9	6,70			
28B-1	1 3/4" x 1 1/4"	44,45	30,99	27,94	15,90	45,50	37,08	-	65,1	129,0	8,30			
32B-1	2" x 1 1/4"	50,8	30,99	29,21	17,81	46,50	42,29	-	67,4	169,0	10,50			
081-1	1/2" x 1/8"	12,7	3,30	7,75	3,66	5,80	9,91	-	10,2	8,2	0,28			
083-1	1/2" x 3/16"	12,7	4,88	7,75	4,09	7,90	10,30	-	14,8	12,0	0,59			
084-1	1/2" x 3/16"	12,7	4,88	7,75	4,09	8,80	11,10	-	13,30	6,8	0,38			

f = Carico di rottura minimo
f = *breaking load minimum*

roller chain